

# AIR MOVING MOTOR: 7.2 in. / 182.9 mm. 220 V 2-Stage


MODEL:115684

## SPECIFICATIONS

<b>Motor Type:</b>	Series Universal
<b>Input Voltage:</b>	220 VAC, 50/60 Hz
<b>Frequency:</b>	50/60 Hz
<b>Fan Diameter:</b>	7.2 in./182.9 mm
<b>No. Fan Stages:</b>	2
<b>Fan System Style:</b>	Bypass
<b>Air Discharge:</b>	Tangential
<b>Operating Temp:</b>	32-104°F/0-40°C
<b>Bearing System:</b>	Ball/Ball
<b>Frame:</b>	Skeleton
<b>Brush Type:</b>	Carbon
<b>Inlet Tube Dia.:</b>	None
<b>RFI Choke:</b>	None
<b>Speed:</b>	1

## ADDITIONAL FEATURES


<b>Regulatory:</b>	UL Recognized
<b>Comm Bracket:</b>	Aluminum
<b>Fan Bracket:</b>	Aluminum
<b>Therm Protect:</b>	None
<b>Insulation Class:</b>	Class A
<b>Added Bearing Prot.:</b>	
<b>Fan Shell Coat:</b>	None
<b>Electrical Conn.:</b>	Lead Wires
<b>Duty Cycle:</b>	Intermittent
<b>Special Feature:</b>	

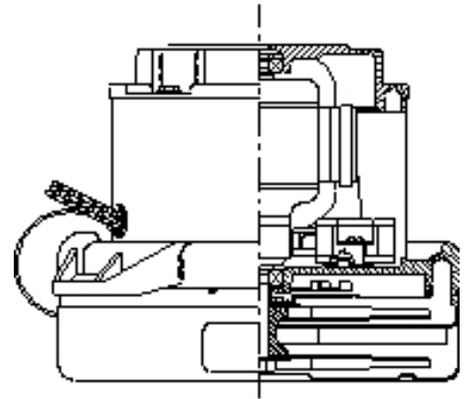

## Design Application

Equipment operating in environments requiring separation of working air from motor ventilating air.  
Designed to handle clean,dry, filtered air only

## PERFORMANCE

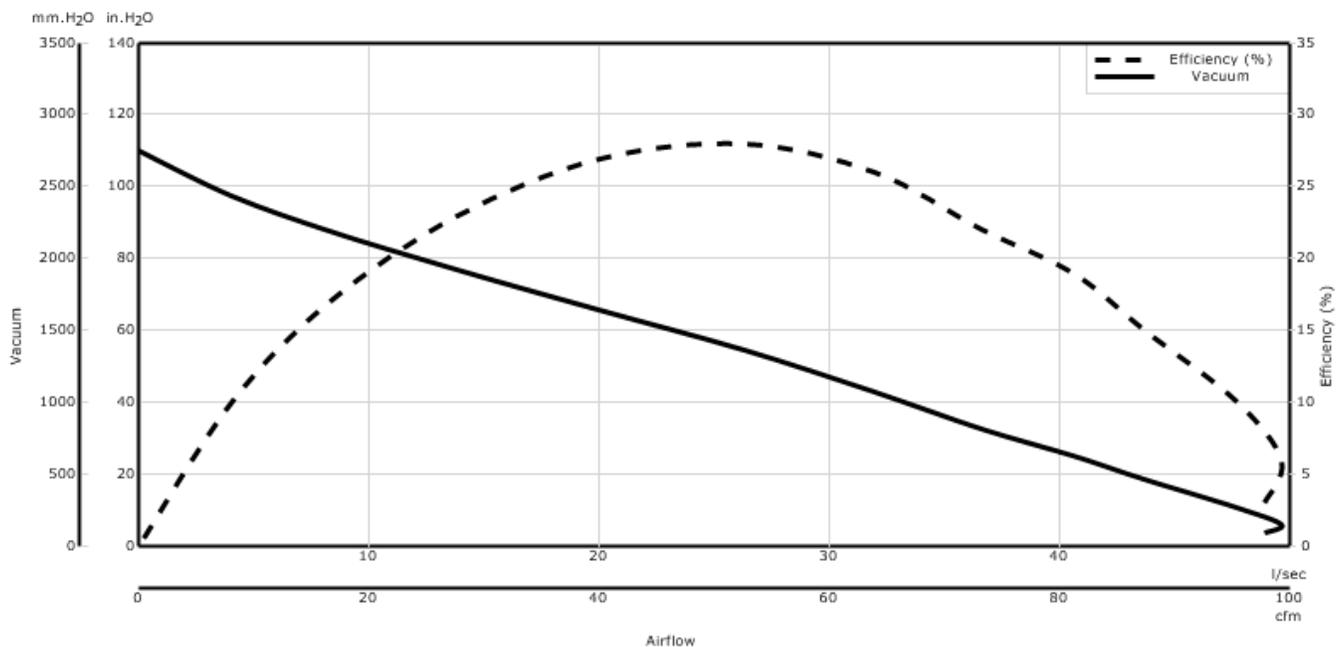

\* Data represents performance of a typical motor sampled from a large production quantity. Individual motor data may vary, due to normal manufacturing variations."

Data shown is measured at regulated nominal voltage and normalized to standard atmospheric pressure and temperature.

## ENGLISH

Orifice (inches)	Amps	Watts (In)	RPM	Vac (In. H2O)	Flow (CFM)	Air Watts
2.000	5.90	1282	15417	3.5	97.8	40
1.750	5.90	1280	15377	6.1	99.2	72
1.500	5.90	1279	15351	10.9	95.4	122
1.250	5.90	1278	15358	18.9	87.4	195
1.125	5.90	1272	15419	25.0	81.2	238
1.000	5.80	1259	15550	32.9	73.3	283
0.875	5.70	1241	15719	42.9	63.9	323
0.750	5.50	1209	16005	54.7	52.7	338
0.625	5.30	1146	16526	65.8	40.0	309
0.500	4.90	1071	17221	77.1	27.6	250
0.375	4.50	984	18087	87.9	16.6	171
0.250	4.10	903	18983	97.7	8.1	93
0.000	3.70	835	19980	110.0	0.0	0

## METRIC

Orifice (mm)	Amps	Watts (In)	RPM	Vac (mm H2O)	Flow (l/Sec)	Air Watts
48.000	5.90	1281	15399	118.0	46.5	54
40.000	5.90	1279	15359	240.0	45.6	107
30.000	5.90	1275	15392	565.0	39.6	219
23.000	5.70	1246	15677	1,026.0	31.3	313
19.000	5.50	1208	16015	1,395.0	24.8	337
16.000	5.30	1149	16505	1,660.0	19.1	310
13.000	4.90	1079	17152	1,930.0	13.6	256
10.000	4.60	997	17957	2,192.0	8.6	183
6.500	4.10	907	18938	2,469.0	4.0	97
0.000	3.70	835	19980	2,794.0	0.0	0

\* Metric data is calculated based on ASTM standards  
 Box tests are performed to ASTM F558

WARNING: When using AMETEK vacuum motors in machines that come in contact with foam, liquid (including water), or other foreign substances, the machine must be designed and constructed to prevent those substances from reaching the fan system, motor housing, and electrical components. Ametek motors other than hazardous duty models should not be applied in machines that come in contact with dry chemicals or other volatile materials. Failure to observe these precautions could cause flashing (depending on volatility) or electrical shock which could result in property damage and severe bodily injury, including death in extreme cases. All applications incorporating Ametek motors should be submitted to appropriate organizations or agencies for testing specifically related to the safety of your equipment.